

Versatile single loop controller
for all basic control functions

- **P, PI, PD or PID characteristic**
 - continuous, time proportioning ON/OFF, heat-off-cool and motorized valve output
- **Basic unit with 1 universal input, 1 analog output, 2 binary inputs/outputs and 3 relays**
 - optional 2nd universal input with transmitter supply
- **Filtering, linearization and square-rooting of the input signal**
- **Ramp rate and high and low limitation for set point and output signal**
- **Programmer with 10 programs, 15 segments**
 - 1 analog and 4 digital profiles each
- **4 configurable alarms**
- **Preconfigured control strategies**
- **Self-tuning of parameters and parameter control**
- **Lock for 'Parameter setting' and 'Configuration' by password or digital input**
- **Spray-water protected front panel IP 65**
 - Brilliant LC display with colour interchange (red/green)
- **Plug-in module slot**
 - for analog and digital inputs/outputs extension or RS 485 interface (Modbus RTU) or PROFIBUS DP interface
- **Serial interface**
 - for parameter setting and configuration as standard



Intelligent,
compact and efficient

ENA Control

Description

The industrial controller Digitrenic 100 is a single channel compact controller used for complementing single control loops for automating small and medium-sized processes in control engineering. It is universally applicable and suitable for accomplishing simple and special control tasks.

Basic version

1 Universal input for the controlled variable. Without having to modify the hardware, thermocouples, the resistance thermometer Pt 100, teletransmitters and standard signals 0/4...20 mA can be connected. If non-linearized temperature transmitters are used, linearization is effected in the controller. Linearization tables for all standard sensors are stored in the device.

1 analog output (0/4...20 mA) for the actuating signal or other values, e.g. for setpoint or actual values.

2 binary inputs/outputs. These inputs and outputs can be configured by the user. These can thus not only be used optionally as controller or alarm outputs but also as inputs for switching over the controller (e.g. manual/automatic).

3 relays for the actuating signal or alarm outputs and for fault reporting.

...a rear interface to connect a parameterisation and configuration PC. This makes the setting work in connection with commissioning easier.

Hardware extension

2nd universal input with integrated transmitter power supply (50 mA) for e. g. external setpoint, feed forward or position feedback for motorized valve control.

1 module slot for extending the input and output levels.

Front control panel

The front control panel gives information on the state of the process and permits specifically-targeted intervention in the process sequence. Digital displays and clear-text information permit precise reading and accurate setting of set point and correction values. The display colour can be set to green or red and can be interchanged as function of process status.

Programmer

Every unit has a configurable programmer which provides a time-dependent set point. Up to 10 programs with 15 segments each can be stored in the unit.

Controller outputs (adjustable acc. to configuration list)

Proportioning ON/OFF controller, PID characteristic.

Heat/off/cool-control, optionally with two switching or one continuous and one switching output.

Motorized valve control for motor driven valves, butterfly valves and gate valves.

Continuous controller, optionally also split-range output with two continuous positioning signals.

Parameter setting

After entering a password, the user accesses the parameter setting level by means of a menu key. At the parameter setting level parameters for the available functions, such as PID parameters, ramp rates for setpoints and control output, alarm setpoints etc., can be set.

Configuration

The menu key accesses the password-protected configuration level. There the standard functions are selected from a list provided in the unit. As an alternative to the user keyboard, the selection can also be made by way of the PC program **IBIS-R**.

This especially simplifies the setting procedure if several units are to be set with the same configuration (see Data Sheet ENA62-6.70 EN).

Technical data

Inputs

Common data:

without electronical isolation
 Resolution $\leq 0.01\%$
 Accuracy (referred to nominal range) $\leq 0.2\%$
 Temperature effects $\leq 0.2\%/10\text{ }^{\circ}\text{C}$
 Hardware input filter limit frequency 7 Hz

Analog:

Universal input AI01

connected to internal device ground

used for standard signal

0/4...20 mA at 50 $\Omega \pm 1\%$

Overcurrent/polarity reversal protection

up to $\pm 40\text{ mA}$

Linearization, square-rooting

configurable

at 4...20 mA

Line break monitoring with configurable reaction

used for thermocouples

Types	Temperature range	Voltage range	Typical accuracy
J	-200...1200 $^{\circ}\text{C}$	77.43 mV	$\leq 0.2\%$
E	-200...1000 $^{\circ}\text{C}$	85.18 mV	$\leq 0.2\%$
K	-200...1400 $^{\circ}\text{C}$	61.53 mV	$\leq 0.2\%$
L	-200...1000 $^{\circ}\text{C}$	78.21 mV	$\leq 0.2\%$
U	-200... 600 $^{\circ}\text{C}$	40.00 mV	$\leq 0.3\%$
R	0...1700 $^{\circ}\text{C}$	20.22 mV	$\leq 0.5\%$
S	0...1800 $^{\circ}\text{C}$	18.72 mV	$\leq 0.5\%$
T	-200... 400 $^{\circ}\text{C}$	26.47 mV	$\leq 0.4\%$
B	0...1800 $^{\circ}\text{C}$	13.24 mV	$\leq 0.6\%$
D	0...2300 $^{\circ}\text{C}$	36.92 mV	$\leq 0.4\%$

Reference junction compensation

internal or external: 0, 20, 50 or 60 $^{\circ}\text{C}$

Internal reference junction

Error limit $\pm 1\text{ }^{\circ}\text{C}/10\text{ K}$
 Reference temperature 22 $^{\circ}\text{C} \pm 1\text{ }^{\circ}\text{C}$
 Ambient temperature 0...50 $^{\circ}\text{C}$

Sensor break monitoring

with configurable reaction

used for resistance thermometer Pt100 DIN

Measuring range

-200.0...+200.0 $^{\circ}\text{C}$
 -200.0...+800.0 $^{\circ}\text{C}$

Measuring current

$\leq 1\text{ mA}$

Measuring circuit

2-wire circuit to 40 Ω line resistance
 Line balancing by software

3-wire circuit

for symmetrical lines up to 3 x 10 Ω

used for resistance teletransmitter (potentiometer)

Measuring ranges

150 Ω , (75...200 Ω); 1.5 k Ω (0.75...2 k Ω)

Measuring current

$\leq 1\text{ mA}$

other data as resistance thermometer

Optional universal input 2 (AI02)

with integrated transmitter power supply

Input for mA, Pt100, thermocouple or potentiometer, technical data as AI01, but with electronical isolation.

Permissible common-mode voltage against device ground

$\pm 4\text{ V DC}$

Permissible differential-mode voltage U_{ss} (50 Hz)

50 mV

Transmitter power supply

output voltage 20...25 V DC, 50 mA

Short-circuit proof

automatic cut off on overload

binary:

2 binary inputs/outputs (B01/B02)

Direct/reverse function configurable

Input DIN 19240	Rated signal V DC	Voltage range (V)	Current range
Rated level	24	20.4...28.8	approx. 1 mA
1-signal	24	13.0...30.2	approx. 1 mA
0-signal	0	- 3.0... 5.0	< 0.2 mA

Output DIN 19240	Rated signal V DC	Voltage range (V)	Current range
Rated level	24 ext.	20.4...28.8	100 mA
1-signal	24	13.0...30.2	0...max. mA
0-signal	0	- 3.0... 5.0	0...0.15 mA

Switching frequency $\leq 8\text{ Hz}$

Outputs

Analog output AO01

galvanical isolated

Control output or retransmission

0/4...20 mA at max. 750 Ω , short-circuit and open-circuit proof

Control range

0... $\geq 21\text{ mA}$

Load-dependency

0.1 %/100 Ω

Resolution

$\geq 0.01\%$

binary:

see inputs

3 relays with NO contact (B03/B04/B05)

for max. 250 V AC, 3 A resistive load
for min. ≥ 12 V AC, ≥ 100 mA
Contact material AgCdO

Programmer**10 programs can be stored**

each program:
15 segments
Set point in physical units
Segment time 0...99:99:9 hours, four digital tracks

Serial interfaces

TTL interface for connection to PC with fixed telegram format matching
parameter setting and configuration program IBIS-R
(see Data Sheet ENA62-6.70 EN).

For adapter cable see ordering information.
Bus capable RS 485 interface retrofittable (see modules).

CPU data**Measured value and correction value resolution**

≤ 0.01 %

Cycle time

approx. 100 ms

Configuration and data backup

Flash-EPROM

Power supply**115 to 230 V AC (90...260 V), 47...63 Hz**

Power consumption:

Max.	13.3 VA (11 W)
Power failure bridging	≥ 150 ms at ≥ 180 V AC

Safety

The device needs no external safety of power supply

Environmental conditions**Climatic class**

3K3 to EN 60721-3-3

Ambient temperature

0...50 °C

Storage and transport temperature

-20...70 °C

Relative humidity

< 85 %, short-term to 95 %, no condensation

Minimum atmospheric pressure

80 kPa

Electromagnetic compatibility

Meets protection requirements of EMC directive 89/336/EEC, 5/89

Interference resistance EN 61000-6-3, June 2005

Interference emission EN 50081-1, 1/92
(referred to: EN 55011, August 2003, class B)

Max. interference resistance, if device is mounted in a metal panel

Connection, case, safety**Degree of protection to DIN EN 60529**

Front panel:	IP 65
Case:	IP 30
Terminals:	IP 20

Electrical safety

Meets requirements to EN 61010 -1 (VDE 0411 part 1), August 2002
Class of protection 1

Clearances and creepage distances as per EN for overvoltage
category 3, degree of contamination 2

All inputs and outputs, including the interface and the transmitter feed but
excepting all relay outputs are functional extra-low voltage circuits to
DIN VDE 0100, part 410.

Mechanical stress features**to EN 60068-2-27, March 1995 and EN 60068-2-6, May 1996**

Shock 30 g/18 ms; Vibration 2 g/0.15 mm/5...150 Hz

Case dimensions

Front panel 96 mm x 96 mm; installed depth 145 mm

Panel cutout

92 mm x 92 mm to DIN IEC 61554

Mounting

in panel
Horizontal high-density construction possible
Vertical spacing 36 mm
Fixing with straining screws

Electrical connections**Plug-in screw terminals**

for wire or stranded wire to 1.5 mm², coded

Power supply

2.5 mm²

No shielded cables required - except for interface leads

Mounting orientation

any

Weight

approx. 600 g without modules
additional module approx. 40 g
additional relay module approx. 80 g

Scope of supply and delivery

2 straining screws (integrated in case), Operating Manual and plug-in screw
terminals

Modules

One of the modules listed below can be plugged in for extending the I/O
or for using digital communication.

Analog inputs

Module AE4_MA for standard signals

4 inputs

0/4...20 mA with electronic isolation

Input resistance

approx. 50 Ω

Signal resolution

$\leq 0.01\%$ for 20 mA

Permissible common-mode voltage

$\leq \pm 4$ V against device ground


Permissible differential-mode voltage

50 mV_{ss}

Destruction proof

Input current < 50 mA

Voltage between input and ground ± 50 V

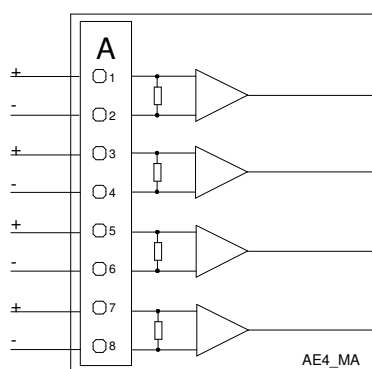

Module 4_MV for thermocouples

4 inputs

-10...80 mV, with electronic isolation

Signal resolution

20.000 for -10...80 mV

Input resistance

approx. 5 M Ω

Permissible common-mode voltage

$\leq \pm 4$ V against device ground

Permissible differential-mode voltage

50 mV_{ss}

Destruction proof

Voltage at one input ± 10 V

Voltage between input and ground ± 50 V


Break monitoring

configurable reaction

Reference junction compensation

configurable, internal or external 0, 20, 50 or 60 °C

Linearization configurable like AI01

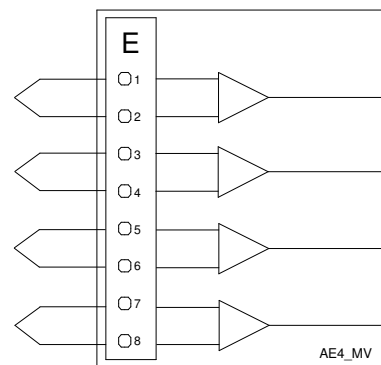

Module AE2_MA/MV-TR

for mA signals or thermocouple with galvanical isolation

2 inputs with galvanical isolation

0/4...20 mA or -10...80 mV (changeable by means of jumpers)

Input resistance at


20 mA: 25 Ω ; -10...80 mV: approx. 5 M Ω

Dielectric strength of input and output leads against each other and against grounded conductor:

Test voltage 500 V AC

Continuous operation 45 V AC

Technical data as modules 4_MV or 4_MA

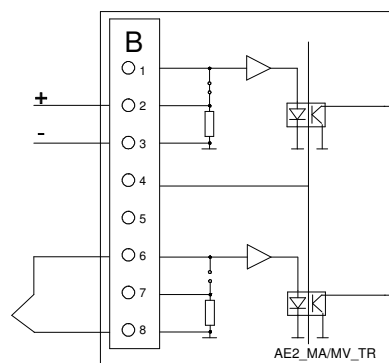

Module AE4_PT_2L for RTD 2-wires

4 inputs

for Pt100 in 2-wire circuit

Range

0...400 Ω

Line resistance

0...125 Ω per line

Permissible differential mode voltage

100 mV_{ss}

Signal resolution

$\leq 0.01\%$ for 400 Ω

Measuring current


≤ 1.5 mA

Measuring range configurable


-200.0...+200.0 °C
 0...+450.0 °C
 -200.0...+800.0 °C

Line balancing by software

Sensor break and short-circuit monitoring
 configurable reaction

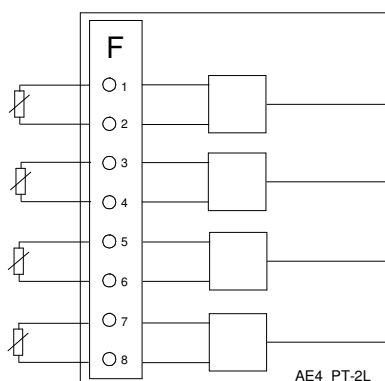**Module AE2_PT-3/4L for RTD 3-/4-wires****2 inputs**

for Pt100 in 3- or 4-wire circuit or potentiometer

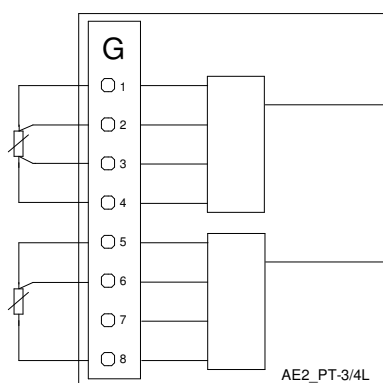

Technical data for Pt100 as module AE4_PT_2_L

Potentiometer R150

0...150 Ω

Series resistance

0...500 Ω

Measuring current

< 1.5 mA

Potentiometer R1500

0...1500 Ω

Series resistance


0...1500 Ω

Measuring current

< 0.5 mA

Binary inputs/outputs**Module BEA6-BIN****6 binary inputs/outputs, galvanical isolation**

Function configurable as input or output, direct or reverse action

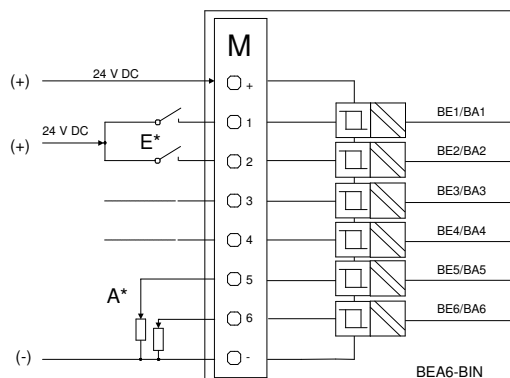

*) Connection example: I = binary inputs; O = binary outputs

Input DIN 19240	Rated signal V DC	Voltage range (V)	Current range
Rated level	24	20.4...28.8	approx. 3 mA
1-signal	24	13.0...30.2	approx. 3 mA
0-signal	0	-3.0...5.0	≤ 0.1 mA

Output DIN 19240	Rated signal V DC	Voltage range (V)	Current range
Rated level	24 ext	20.4...28.8	100 mA
1-Signal	24	13.0...30.2	0...max. mA
0-Signal	0	-3.0...5.0	0...0.1 mA

Module BA4_REL**4 relays**


with NO contact for max. 250 V AC, 1 A resistive load

Built-in spark-quenching

0.022 μF + 100 Ω

For max. 250 V, max. 1 A at cos φ = 0.9

Contact material AgCdO

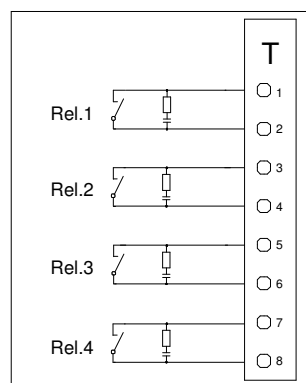

Module AE4_F

4 inputs for:

Frequency (1/4 inputs)

Range 1 input	0...20 kHz
Range 4 inputs	0...10 kHz
Signal resolution	1 Hz

Periode (1-4 inputs)

Range	0...20 s
Signal resolution	1 ms

Impulses (1-4 inputs)/incremental angle (2 inputs)

Range: 0...20.000 impulses/cycletime
min. impulse length: 50 µs

Absolute incremental angle (1 input)

Range: 0...20.000 impulses
min. impulse length: 50 µs

Types of input signals:**Max. 2 Namur inputs according to DIN 19234**


Open circuit voltage	$U_i = 9.5 \text{ V}$
Internal resistance	$R_i = 1 \text{ k}\Omega$
Signal range	$L = 0 \dots 1.2 \text{ mA/H} = 2.1 \dots 4.0 \text{ mA}$

Max. 4 digital inputs according to DIN 19240 (0/24 V DC)

Input resistance	$R_E > 6 \text{ k}\Omega$
Signal range	$L = -3 \dots 5 \text{ V/H} = 13 \dots 20.2 \text{ V}$

Max. 4 digital inputs TTL (0/5 V DC)

Input resistance	$R_E > 6 \text{ k}\Omega$
Signal range	$L = 0 \dots 0.8 \text{ V/H} = 3.5 \dots 24 \text{ V}$

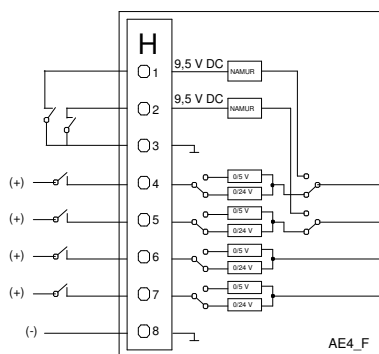
Accuracy $\pm 0.1 \%$ **Analog outputs****Module AA3_MA****Triple current output**

0/4...20 mA at 750 Ω


Signal resolution $\leq 0.02 \%$ for 20 mA**Load dependency**

0.1 %/100 Ω


Output monitoring, reaction configurable

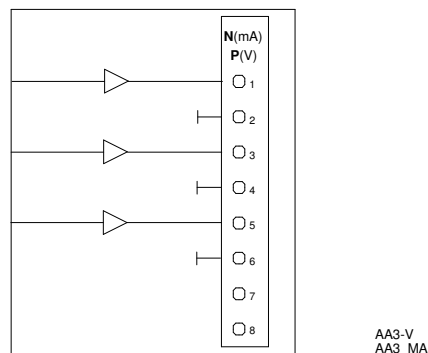Module AA3_VTriple voltage output 0/2...10 V $\geq 5 \text{ k}\Omega$ **Interface modules****Module RS 485 or RS 232**


Interface module in accordance with RS 485 or RS 232 specification.
Electrically isolated. Standard protocol: MODBUS-RTU.

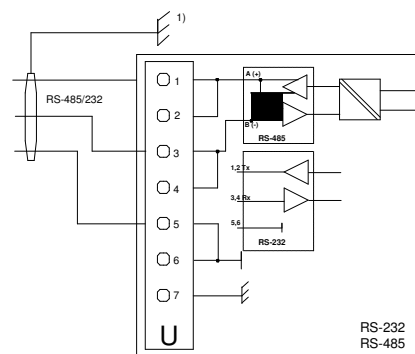**Module PROFIBUS DP/DPV1 (Slave)**


Module with the full functional capabilities of DIN 19245, parts 1 to 4.
Transmission rate up to 1.5 Mbaud.
Bus terminating adapter see accessories on page 10

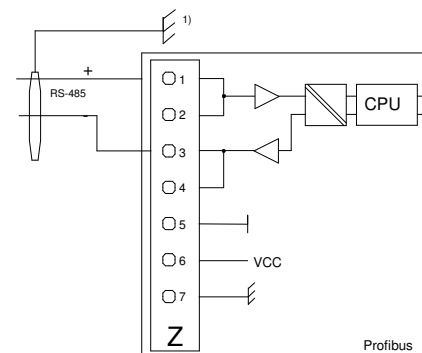

Dimensional drawings

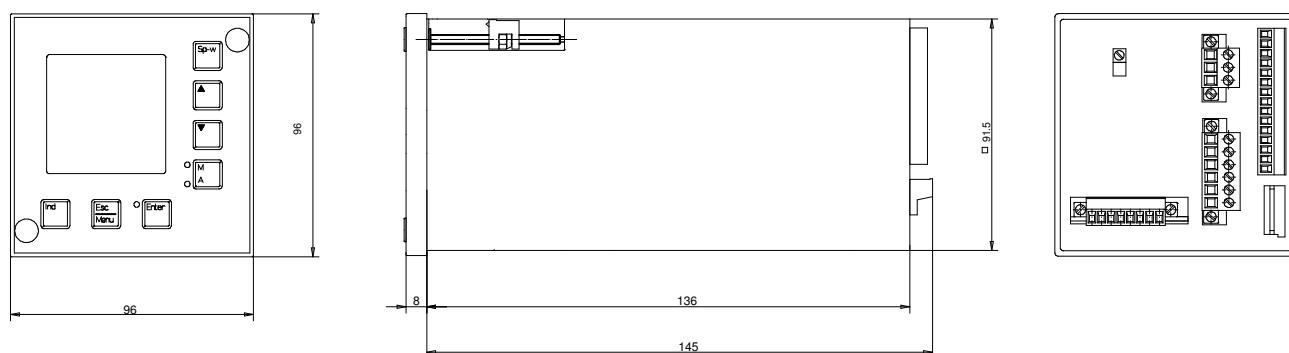

Connection diagrams of basic models

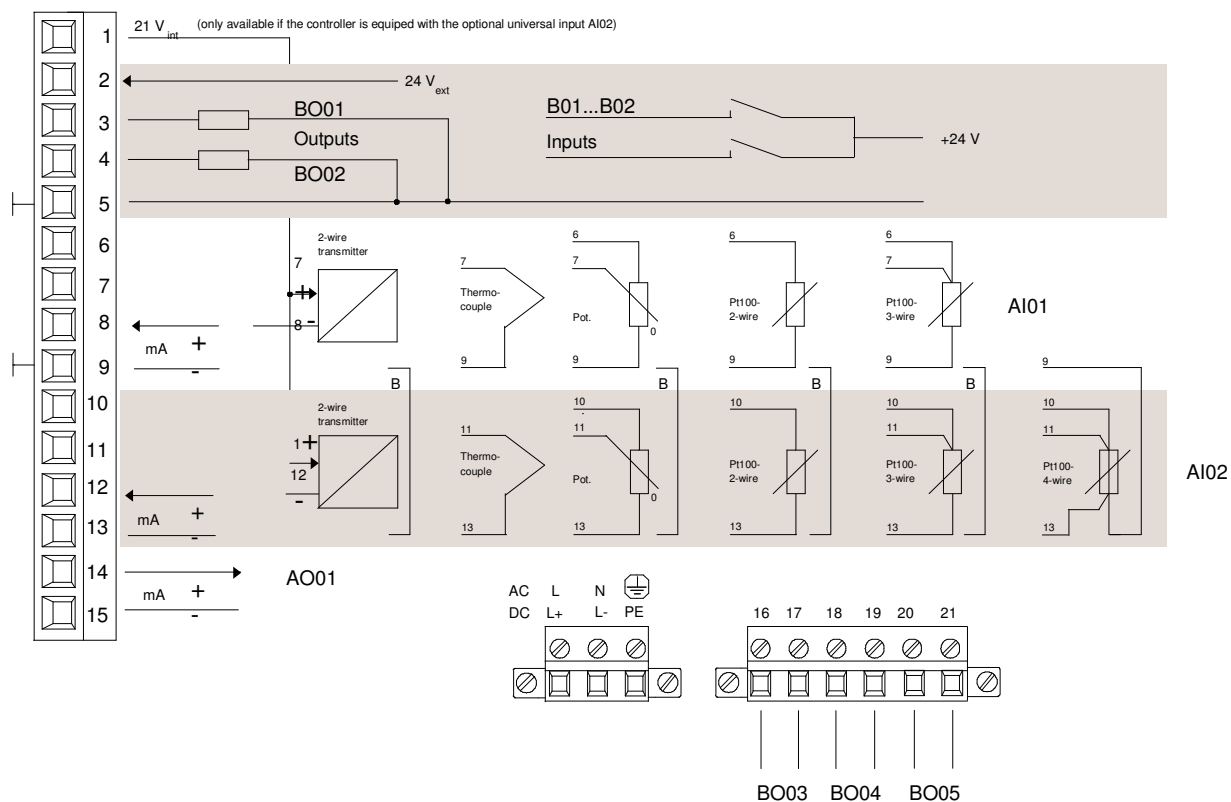

Connection diagram

AI01	Universal input 1
AI02	Universal input 2, optional
B01...B02	Binary inputs or outputs, Function configurable
AO01	Analog output 1 (0/4...20 mA)
21 V	Feed for 2-wire transmitter and/or binary inputs and outputs, optional
B	Jumper required (terminal 9/13) only if power feed to transmitter for AI02 from terminal 1, or if AI02 is used for Pt100 or potentiometer input
BO03...BO05	Relay outputs (NO contact) max. 250 V AC/1 A

Ordering information

	Catalog No.									
Digitrenic 100	V61611A-	1	1	0	0	0	0	3	0	
Power supply 115-230 V AC Basic instrument with 2 universal inputs with integrated transmitter supply No extension module Adjusted control strategy Continuous control (factory setting, other strategy configurable) Design Front Black, RAL 9005 with grey keys Manual German, English on CD										
Configuration Entered at position of current order (clear text)										Code 301

Special features	Catalog No.	Code		
Accessories				
IBIS-R PC program for setting parameter and configuration (see Data Sheet ENA62-6.70 EN) PC cable with adapter for connection to the serial interface TTL interface	62695-0346270			
Spare parts				
Analog input AI02 with integrated transmitter power supply	0346866V			









Ordering information

The extension modul can also be ordered seperately and plugged in later.					
Accessories					
Part	Designation		Catalog No.		
GSD	Device master data file for PROFIBUS DP, disk		62695-3601109		
Bus terminating adapter			62619-0346488		
Type of modules	Designation	Code	Catalog No.		
Inputs					
AE4_mV	4fold thermocouple	E	62619-0346280		
AE2_mA/mV_TR	Dual thermocouple or mA with galvanical isolation	B	62619-0346250		
AE4_PT_2L	4fold Pt100 in 2-wire circuit	F	62619-0346255		
AE2_PT_3/4L	2fold Pt100 in 3-/4-wire circuit	G	62619-0346281		
AE4_F	4fold frequency input	H	62619-0346444		
AE4_mA	4fold 0/4...20mA with electrical isolation	A	62619-0346254		
Binary inputs/outputs					
BEA6_BIN	6fold binary input/output	M	62619-0346282		
Outputs					
AA3_mA	Triple 0/4...20 mA	N	62619-0346252		
AA3_V	Triple 0/2...10 V	P	62619-0346253		
BA4_REL	4fold relay	T	62619-0346263		
Interfaces					
RS 485	RS 485, not dependent on protocol, bus compatible	U	62619-0346257		
RS 232	RS 232, not dependent on protocol, not bus compatible	Y	62619-0346456		
PROFIBUS	PROFIBUS DP/DPV1 (slave)	Z	62619-0346470		

Ordering information		Catalog No.							Code		
List configuration		V61675A-									
Customer-specific configuration as separate item (please enclose task definition in clear text)					0	0	0	0	3		
List configuration											
List configuration		4									
Adopted from previous order (see Code No. 302)		5									
Delivery											
Stored in unit (see Code No. 301)		1									
3.5 inch. disk		2									
by E-Mail		4									
Configuration											
Entered at position of current order (clear text)									301		
Adopted from order number and position of previous order (clear text)									302		

Documentation on the configuration is in German (1 copy is provided);
other languages on request!

Applications

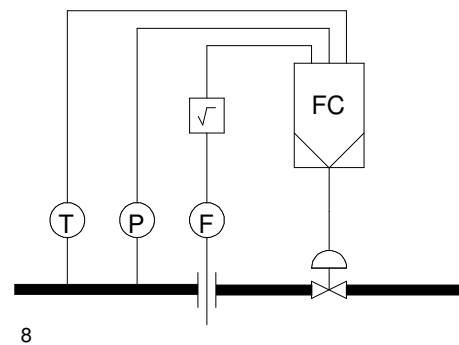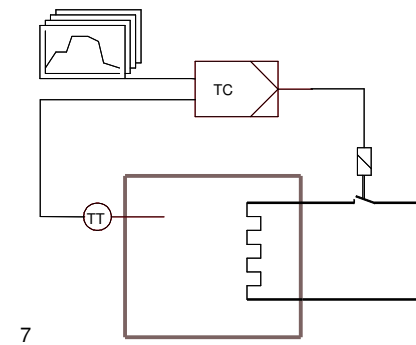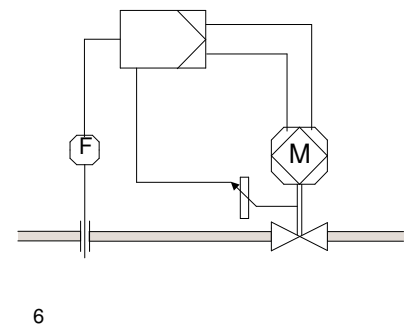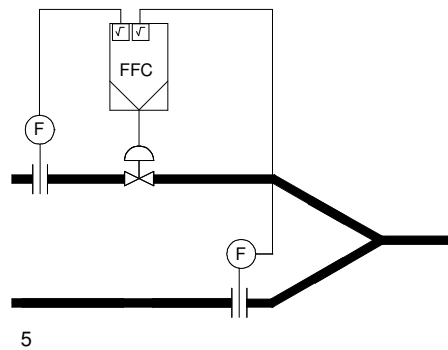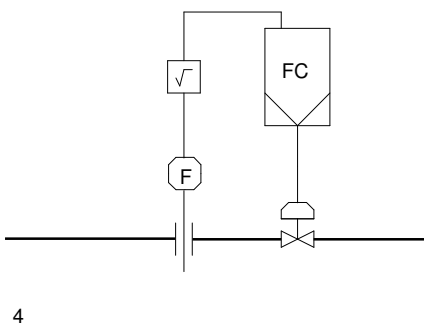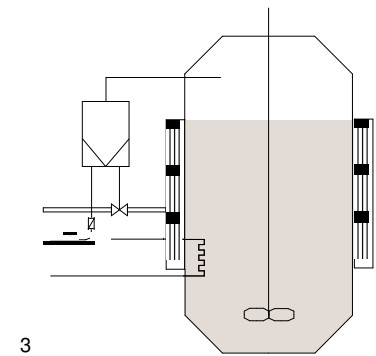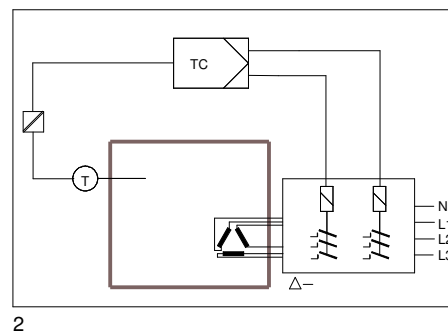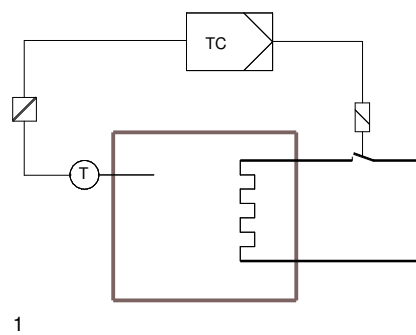

Split range
Feed forward
Backup control
Setpoint station
Manual station
Alarm station

- 1 ON/OFF control e.g. for furnace control
- 2 ON/OFF control with additional heating power selector high-low-off
- 3 Heat-off-cool control, e.g. heating (ON/OFF), cooling (continuous)
- 4 Continuous control e.g. for flow control
- 5 Ratio control
- 6 Motorized valve control with or without position feedback
- 7 Program control with up to 10 profiles
- 8 Flow compensation for gas or steam

ENAControl

ENAControl
Hoeseler Platz 2
D-42579 Heiligenhaus
DEUTSCHLAND

Tel: +49 2056/259-5535
Fax: +49 2056/259-5054
www.enacontrol.net

ENAControl has Sales & Customer Support

The Company's policy is one of continuous product improvement and the right is reserved to modify the information contained herein without notice.

Printed in the Fed. Rep. of Germany (01.2007)

© ENAControl 2007